
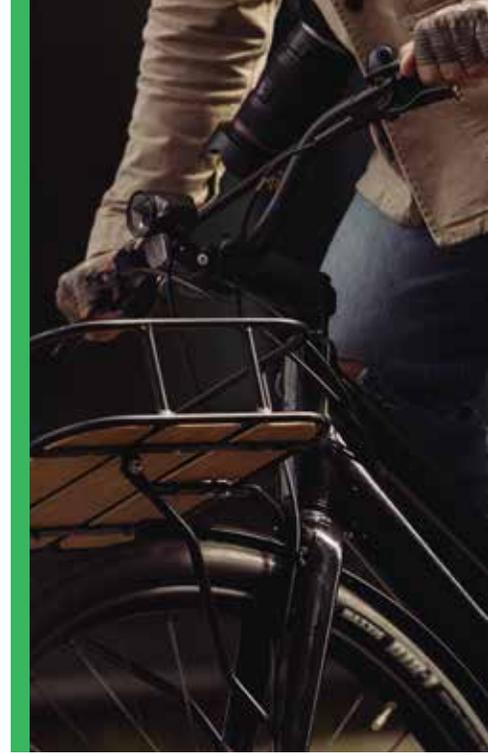


Treadwell Neo

Quick Start Guide

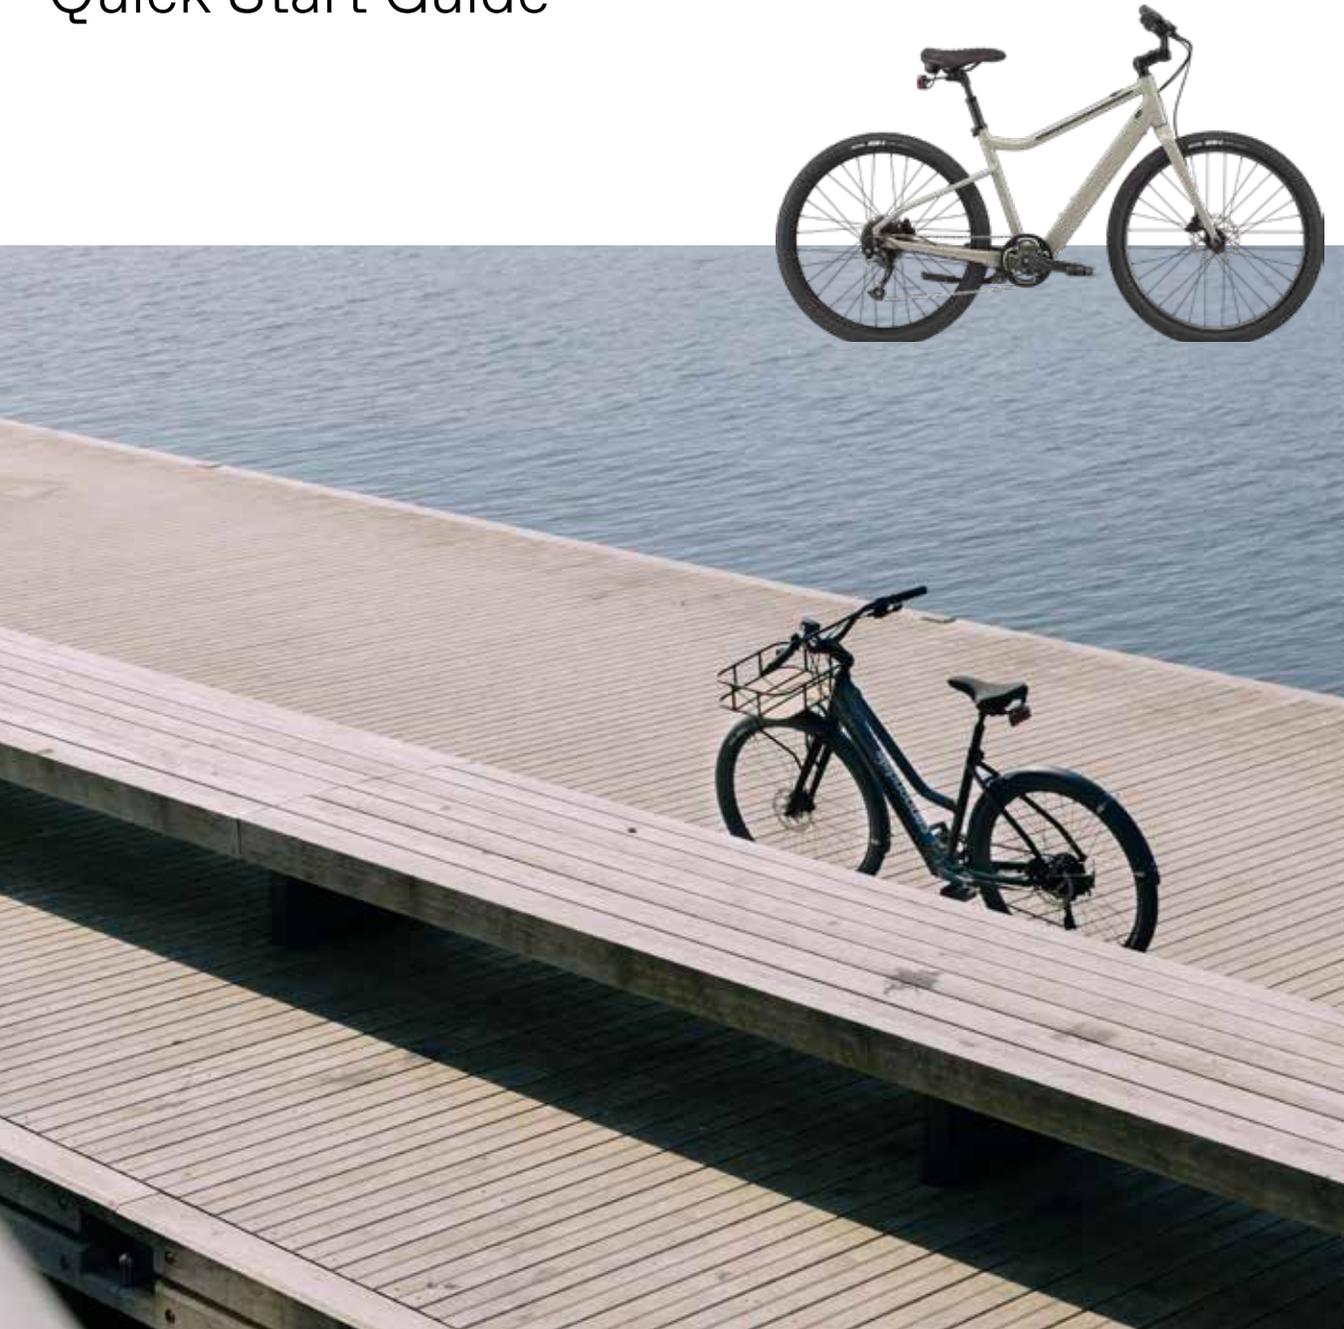

Applies to: Treadwell Neo

cannondale

Welcome to the Cannondale family.

First up, thank you for buying a new Cannondale bike – we’re excited to have you on board and to get you out riding as soon as possible. Our new assembly process is easy-to-follow – using methods outlined in this guide to assemble your new Cannondale at home, plus it’s even easier to do so with a friend. Our guide will take you through the simple steps from start to finish – you can also follow along with a how-to video, as you build your bike, just visit: **ridersupport@cannondale.com**

If you still have any questions, then our Cannondale rider support staff are ready to help you. Feel free to give us a call at **1-800-245-3872 (BIKE USA)**.

Also, when your new bike is all assembled and ready to ride, we’d love to check it out – please don’t forget to tag #ridecannondale in your social media. Enjoy the ride!



WARNING

This is a Quick Start Guide, not an Owner’s manual.

Bicycling is an active sport with inherent risk. A wide range of injuries are possible. Due to the nature of bicycle riding, the situations you encounter while riding, you will be exposed to the risk of serious injury, paralysis or death. This risk cannot be eliminated. You can minimize the risk in many ways. Begin by reading the complete Charge Bicycle Owner’s manual accompanying this bike and available online at www.chargebikes.com, particularly section “IMPORTANT SAFETY INFORMATION”.

The 4 major steps to setting up our ride.



Getting your bike ready for assembly.

This video applies to one Cannondale Platform:

- Treadwell Neo

Let's get your bike out of the box.

- Use a flat head screwdriver to carefully open the upper flap of the box.
- Prior to assembling your bike, review the pre-ride checklist and Assembly Instruction Guide.
- Confirm that a builder has completed the checklist.
- Carefully lift the bike out of the box and set it onto the top of the box.
- Remove the front wheel from the bike by carefully removing the zip ties or Velcro, then remove all packaging from the wheel and set it aside.
- Remove all additional packaging from the bike.
- Carefully lift and rotate the bike, lowering it gently back into the box with the fork overhanging the side of the box.



Tools Needed:

- Flat-Head Screwdriver
- Phillips-Head Screwdriver
- Box Cutter
- Scissors

Tools Included:

- Torque Wrench
- Allen Keys
- Pedal Wrench



Gently lift your bike out of the box and set it on top of the box. Make sure the attached wheel is facing upwards

Let's get your bike out of the box.

- H. Inside the small box, you'll find a smaller box of parts, necessary tools, component documentation and manuals.
- I. Once the bike is assembled, but before you ride, please read the owner's manual.
- J. Locate and remove the warranty card and set it aside with the owner's manual.



Lift the entire bike up off the box and set the rear end into the standing box.

The front fork should rest over the edge of the box.


Step 1. Install your handlebars.

- A.** Using the included hex wrench, loosen and remove the bolts and faceplate from the stem. The stem connects the handlebar to the fork. Set the bolts and faceplate aside together, so you don't lose anything.
- B.** Place the handlebar into the stem and verify the brake hoses and shift cables wrap around the frame cleanly, without visible kinks in the lines.
- C.** Loosely reattach the faceplate to the stem. Take care to not tighten one bolt more than another. Your goal is a consistent gap between the stem and faceplate.
- D.** Center the handlebar in the stem using the markings on the bar, then roll it back into a comfortable position.
- E.** Hand-tighten the stem bolts using the Allen key, ensuring there's an even gap between the stem body and faceplate at both the top and bottom of the stem. You will fully tighten these later.



Step 2. Install your front wheel.

- A.** Remove the disc brake pad spacer from the front caliper. Take care not to pull the front brake lever while either the pad spacer or disc brake rotor is not present in the caliper.
- B.** Carefully lift the bike from the box and gently place the fork ends on the ground.
- C.** Remember: **Do not** turn your e-bike on during the assembly process.
- D.** The quick-release skewer is comprised of five major parts: the skewer itself; a washer; two conical springs; and the adjusting nut.
- E.** Unthread and remove the adjusting nut and the neighboring conical spring from the skewer.

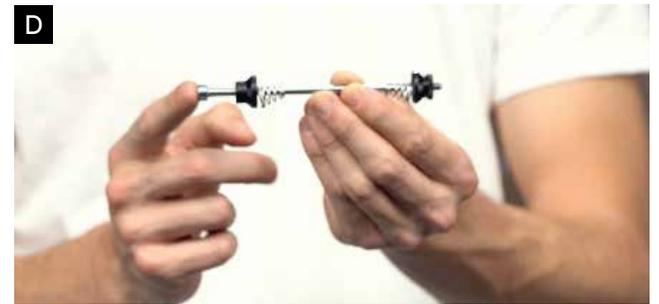

Step 2. Install your front wheel.

- F.** Insert the skewer into the wheel axle on the opposite side of the disc brake rotor. Push the skewer through the hub to the other side of the wheel.
- G.** Place the conical spring back onto the skewer with the narrow end pointing toward the wheel, then thread on the adjusting nut.
- H.** Gently lift the front end of the bike and roll the wheel back in-between the fork legs, making sure the brake rotor goes in-between the brake pads.
- I.** Tighten the skewer with a 6mm hex wrench while holding the adjusting nut with your other hand. The wrench should leave an imprint on your hand when properly tightened.
- J.** Lower the kickstand, then remove any additional packaging from the bike.




Step 3. Install your pedals.

- A.** Pedals are left- and right-specific. Locate the left and right markings on the pedal spindles prior to installation.
- B.** Locate the bag of grease and carefully insert the threaded portion of the pedal spindle into the bag.
- C.** Insert the right pedal (marked with R) into the right/drive side crank arm and tighten with your fingers. Repeat with the left pedal (with an L on it). Please note: Both pedals tighten in the direction of the front wheel.
- D.** Tighten both pedals down very firmly using the provided pedal wrench.



Some final pre-ride checks.

- A. Torque Bolts.** Select the correct bit for the stem bolts and install it into the torque wrench.
- B.** Look for the torque specification markings on the front and back of the stem, as well as the seatpost. If these markings are absent, torque all stem, seatpost and seat collar bolts to 7 Nm.
- C.** Tighten the stem bolts in an 'X' pattern and ensure the gap is even between the stem and faceplate at all four bolts.
- D. Reflectors.** Ensure the front reflector points straight ahead, perpendicular to the ground.
- E.** The rear reflector must point straight back.
- F.** Gently pull the wheel reflectors toward the rim to ensure they are braced by the spokes.

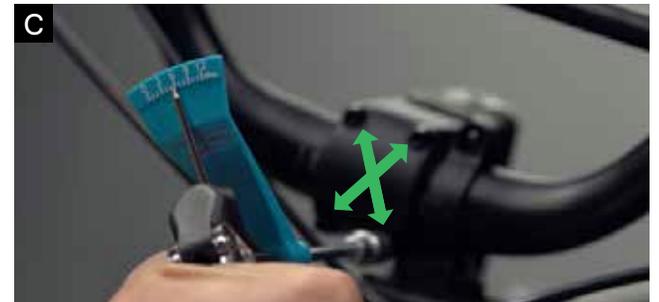

Some final pre-ride checks.

- G. Seat Height.** Adjust seat height by loosening the seatpost collar. Standing next to the bike, position the saddle so it's the same height as your hip.
- H.** Align the saddle with the frame and tighten the seatpost clamp
- I.** When riding, you should have a slight bend in your knee when the pedal is at the bottom of its rotation.
- J.** Using the torque wrench, tighten the seat clamp to the specified torque value.
- K. Twist Check.** Secure the front wheel between your legs and turn the handlebar. If the handlebar and wheel move independently, the stem bolts are not tight enough. Use the torque wrench and correct bit to properly torque the bolts.
- L.** Attempt to rotate the handlebar forward and backward in the stem. If it moves, the stem faceplate bolts are not tight enough.
- M.** Grab the front and rear of the seat and attempt to tilt it on the seat post head. It should not move.



Some final pre-ride checks.

- N. Brake Check.** Confirm the front and rear brakes engage when the levers are squeezed.
- O.** The brake lever and handlebar should not come into contact with the brakes fully engaged.
- P. Wheel Engagement.** Using the 6mm hex wrench, confirm the front wheel is securely installed. The wrench should leave an imprint on your hand.
- Q. Tire Pressure.** Inflate the tires to the manufacturer's recommended tire pressure, marked on the tire



Some final pre-ride checks.

- R. Charging.** Unbox the e-bike charger and remove any additional packaging from the charger itself.
- S.** Read the instructions included with the charger, then assemble the charger.
- T.** Insert the charging end into the charge port. Be sure to orient the charging end with the port.
- U** Open the charge port, located near the pedals.
- V.** Prior to inserting the charger, ensure the lock ring on the charging end is in the open position.
- W.** Insert the charger into the charge port, then turn the lock ring clockwise to lock it into place.
- X.** When the charger is properly installed, the power button will glow white, then transition to a yellow and orange fade. This confirms your e-bike is charging.



Welcome to the family.



@ridecannondale





cannondale®